

MixPan 100 litres

Model – MixPan 100 code MG4224270



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Standard features

- Bratt pan with integrated mixer
- Temperature control between 50°C – 250°C
- Stepless mixing speed 5-40 rpm
- Two mixing programs, autoreverse
- Elevated control pillar
- Electric tilting with push button
- Tilting height 600 mm
- Safety grid lid
- Integrated mixer with three mixing arms
- Food grade thermopolymer scrapers for mixing tool

Options

- Frames for fixed installation (custom heights on request)
- Free standing frame with feet
- Group installation, also with Metos kettles
- Alternative operating voltages
- Water filling manual / automatic
- Hand showers standard, reel-in or heavy duty
- Draw off valves and taps

Materials

- Construction stainless steel EN1.4301, EN1.4016
- Protection class IPX5

Volume

Volume liters	Frying surface
Gross 109 l/ net 100 l	0.43 m ²

Electrical connections

Voltage	Power kW	Max current A	Fuse A
3/N/PE 400V	26.2	43.7	50

Water connection


Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option).

Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) - only for handshower.

MixPan 100 litres


Model – MixPan 100 code MG4224270

metos

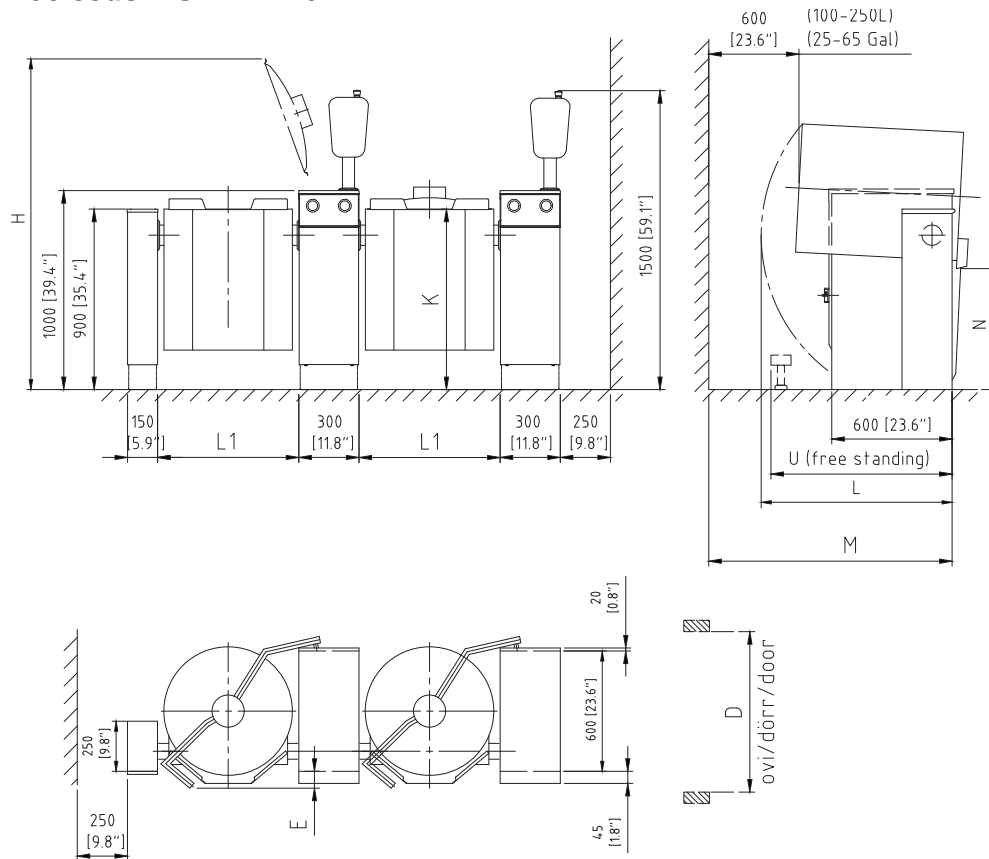

Dimensions in mm

	L1	H	K	L	M	M1	E	D (FM)	D (FS)	N	V	S	T	U	KG
100 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	255
150 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	260
155 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	305
250 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	310

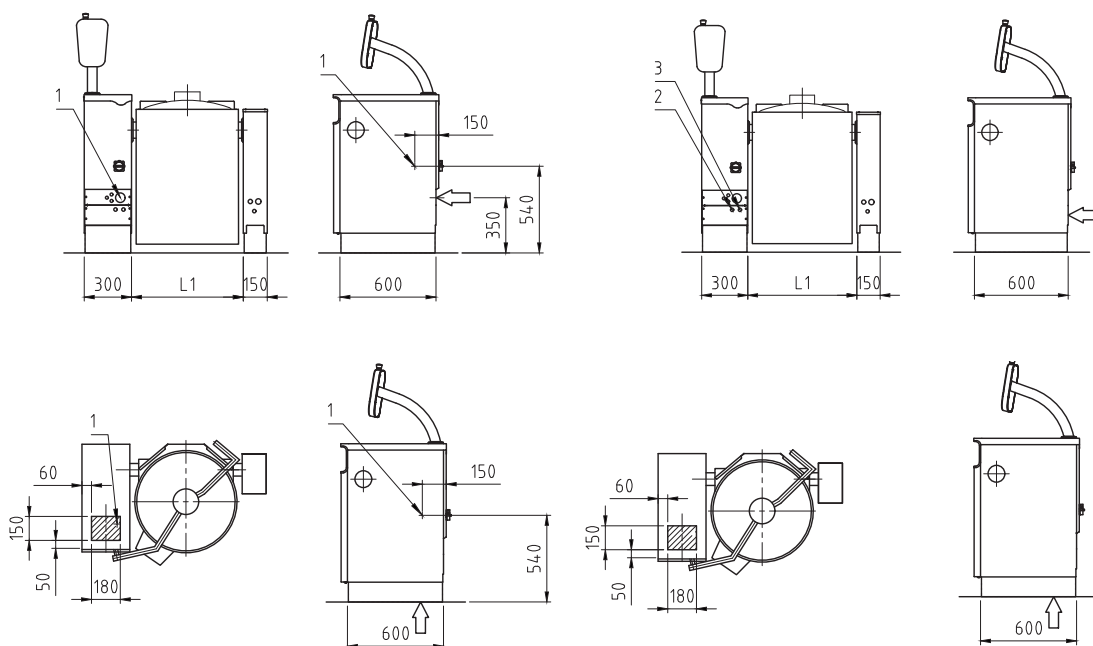

1. Electrical connection from rear PG48 GLAND
2. Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option)
3. Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) – only for handshower

an Ali Group Company

National and local regulations must be observed when installing the pan.



The Spirit of Excellence



Rev 14.08.2026

MixPan 150 litres

Model – MixPan 150 code MG4224272



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Standard features

- Bratt pan with integrated mixer
- Temperature control between 50°C – 250°C
- Stepless mixing speed 5-40 rpm
- Two mixing programs, autoreverse
- Elevated control pillar
- Electric tilting with push button
- Tilting height 600 mm
- Safety grid lid
- Integrated mixer with three mixing arms
- Food grade thermopolymer scrapers for mixing tool

Options

- Frames for fixed installation (custom heights on request)
- Free standing frame with feet
- Group installation, also with Metos kettles
- Alternative operating voltages
- Water filling manual / automatic
- Hand showers standard, reel-in or heavy duty
- Draw off valves and taps

Materials

- Construction stainless steel EN1.4301, EN1.4016
- Protection class IPX5

Volume

Volume liters	Frying surface
Gross 163 l/ net 150 l	0.43 m ²

Electrical connections

Voltage	Power kW	Max current A	Fuse A
3/N/PE 400V	26.2	43.7	50

Water connection


Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option).

Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) - only for handshower.

MixPan 150 litres

Model – MixPan 150 code MG4224272


metos

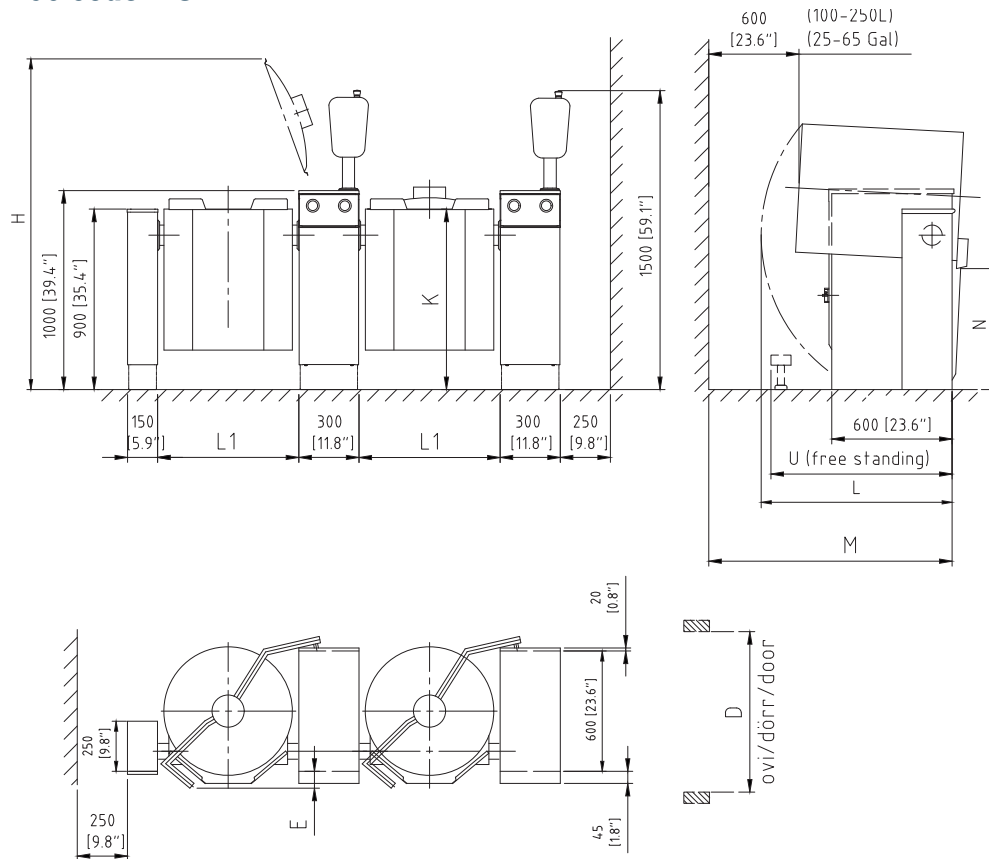

Floor mounted
Free standing

Dimensions in mm

	L1	H	K	L	M	M1	E	D (FM)	D (FS)	N	V	S	T	U	KG
100 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	255
150 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	260
155 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	305
250 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	310

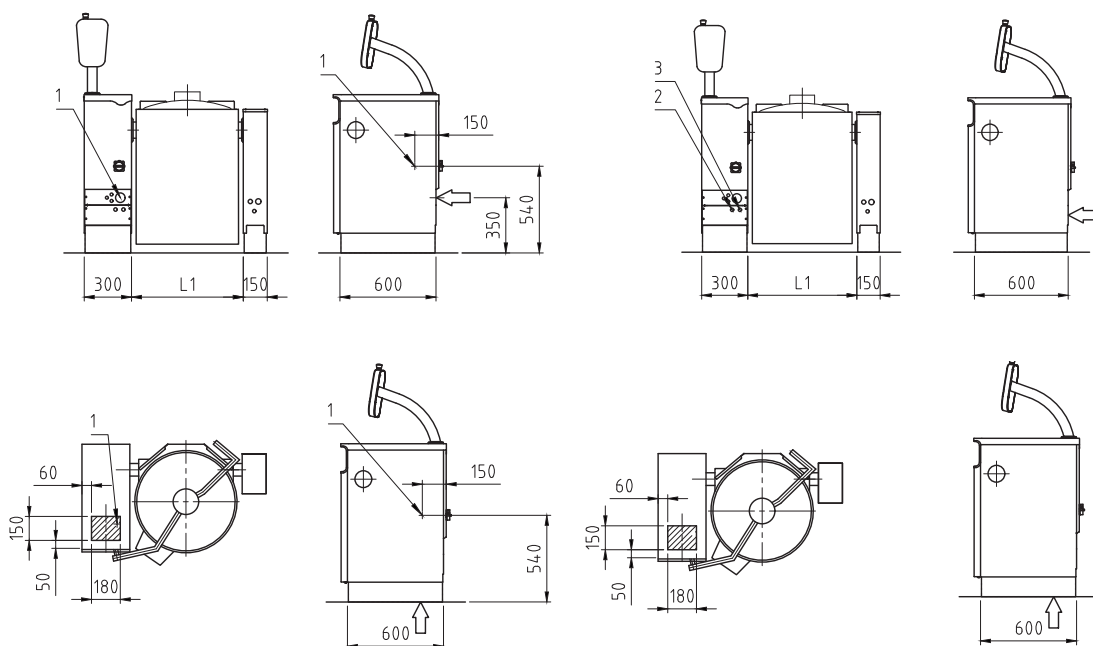

1. Electrical connection from rear PG48 GLAND
2. Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option)
3. Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) – only for handshower

an Ali Group Company

National and local regulations must be observed when installing the pan.



The Spirit of Excellence



Rev 14.08.2026

MixPan 155 litres

Model – MixPan 155 code MG4224274



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Standard features

- Bratt pan with integrated mixer
- Temperature control between 50°C – 250°C
- Stepless mixing speed 5-40 rpm
- Two mixing programs, autoreverse
- Elevated control pillar
- Electric tilting with push button
- Tilting height 600 mm
- Safety grid lid
- Integrated mixer with three mixing arms
- Food grade thermopolymer scrapers for mixing tool

Options

- Frames for fixed installation (custom heights on request)
- Free standing frame with feet
- Group installation, also with Metos kettles
- Alternative operating voltages
- Water filling manual / automatic
- Hand showers standard, reel-in or heavy duty
- Draw off valves and taps

Materials

- Construction stainless steel EN1.4301, EN1.4016
- Protection class IPX5

Volume

Volume liters	Frying surface
Gross 174 l/ net 155 l	0.69 m ²

Electrical connections

Voltage	Power kW	Max current A	Fuse A
3/N/PE 400V	38.3	61.2	63A

Water connection


Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option).

Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) - only for handshower.

MixPan 155 litres

Model – MixPan 155 code MG4224274


metos

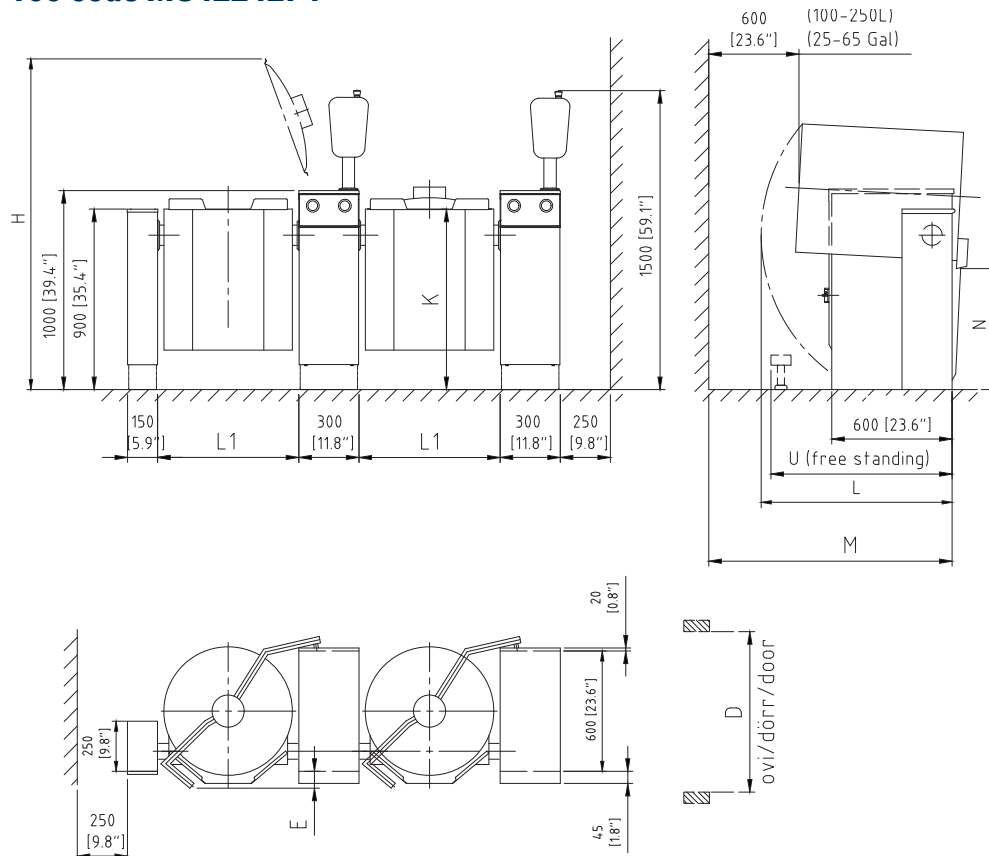

Floor mounted
Free standing

Dimensions in mm

	L1	H	K	L	M	M1	E	D (FM)	D (FS)	N	V	S	T	U	KG
100 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	255
150 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	260
155 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	305
250 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	310

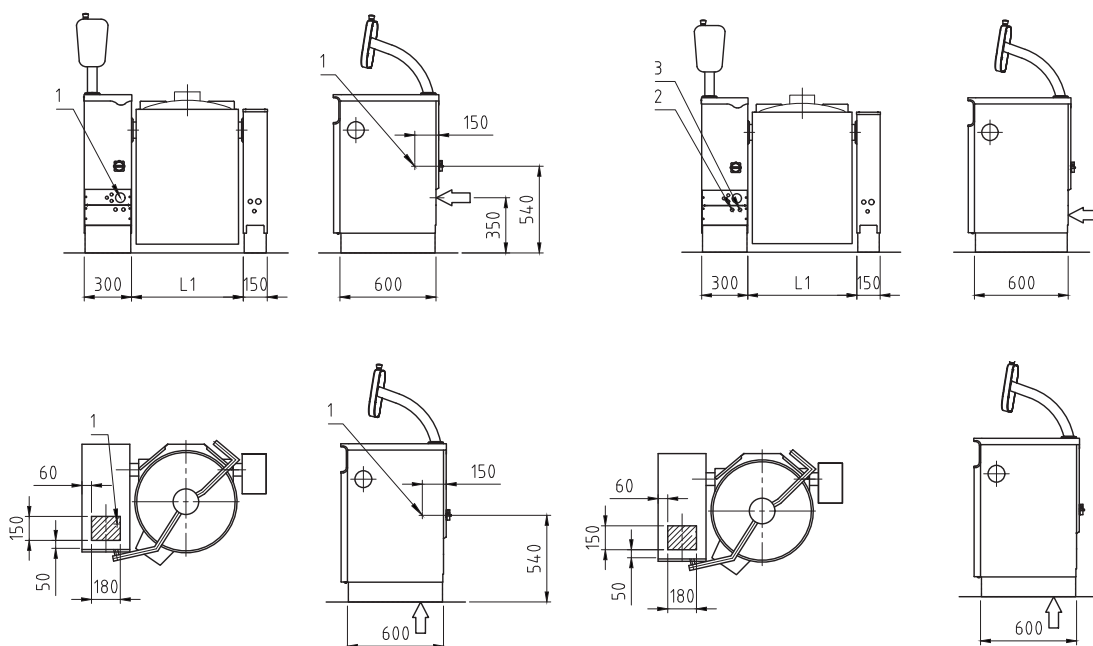

1. Electrical connection from rear PG48 GLAND
2. Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option)
3. Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) – only for handshower

an Ali Group Company

National and local regulations must be observed when installing the pan.



The Spirit of Excellence



Rev 14.08.2026

MixPan 250 litres

Model – MixPan 250 code MG4224276



metos
cooking solutions

Metos Cooking Solutions
Ahjonkaarre, FI-04220 Kerava, Finland
Tel. +358 204 3913
mcs@metos.com
mcs.metos.com



Standard features

- Bratt pan with integrated mixer
- Temperature control between 50°C – 250°C
- Stepless mixing speed 5-40 rpm
- Two mixing programs, autoreverse
- Elevated control pillar
- Electric tilting with push button
- Tilting height 600 mm
- Safety grid lid
- Integrated mixer with three mixing arms
- Food grade thermopolymer scrapers for mixing tool

Options

- Frames for fixed installation (custom heights on request)
- Free standing frame with feet
- Group installation, also with Metos kettles
- Alternative operating voltages
- Water filling manual / automatic
- Hand showers standard, reel-in or heavy duty
- Draw off valves and taps

Materials

- Construction stainless steel EN1.4301, EN1.4016
- Protection class IPX5

Volume

Volume liters	Frying surface
Gross 261 l/ net 250 l	0.69 m ²

Electrical connections

Voltage	Power kW	Max current A	Fuse A
3/N/PE 400V	38.3	61.2	63A


Water connection

Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option).
Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) - only for handshower.

MixPan 250 litres

Model – MixPan 250 code MG4224276


metos

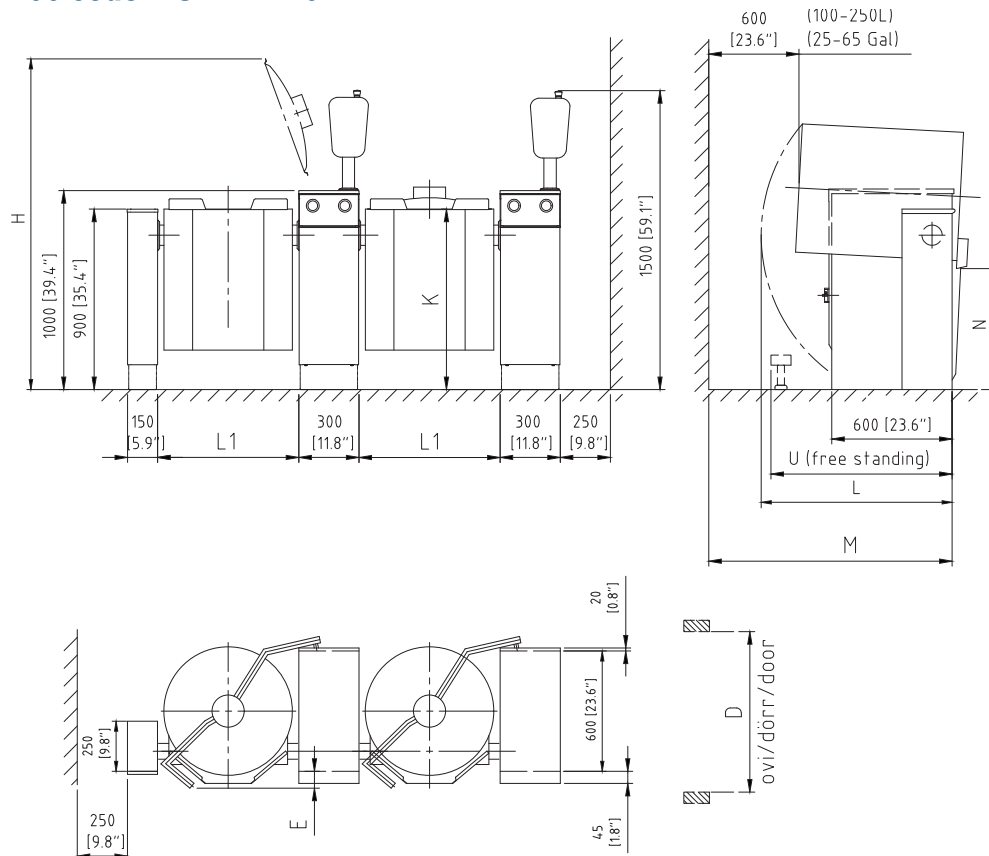

Floor mounted
Free standing

Dimensions in mm

	L1	H	K	L	M	M1	E	D (FM)	D (FS)	N	V	S	T	U	KG
100 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	255
150 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	260
155 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	305
250 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	310

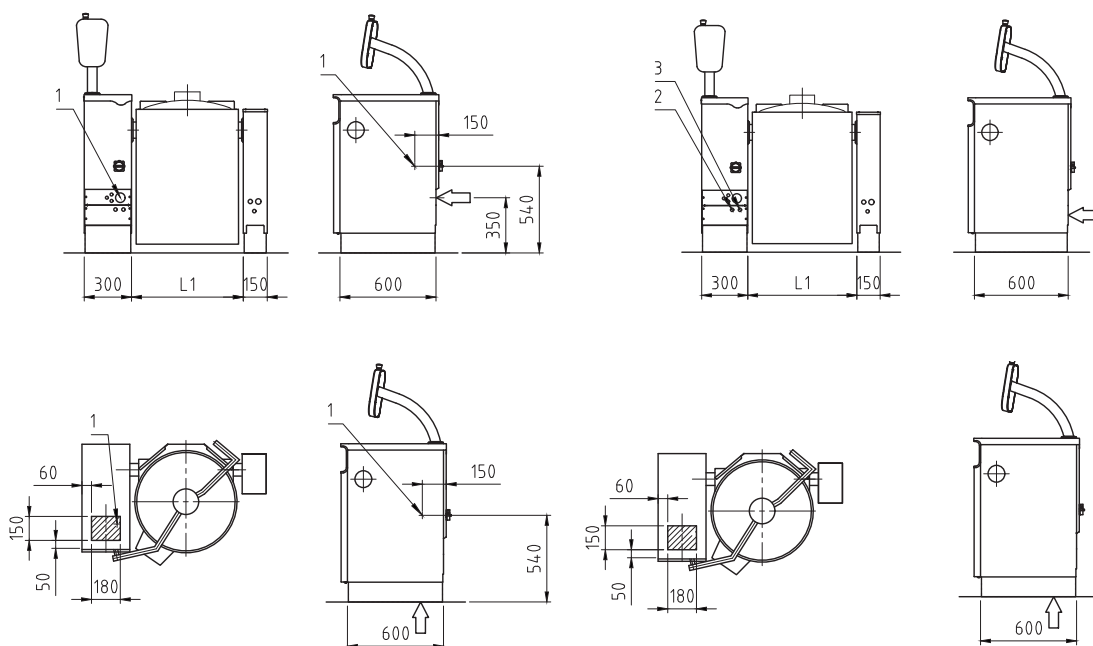

1. Electrical connection from rear PG48 GLAND
2. Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option)
3. Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) – only for handshower

an Ali Group Company

National and local regulations must be observed when installing the pan.



The Spirit of Excellence



Rev 14.08.2026