

Futura HD 200 Brattpan

Model – Futura HD 200 code 3756248



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Standard features

- Elevated control pillar
- Temperature control to 250°C
- 2-zone heating
- 2x Electric tilting motor
- Depth 273mm
- 4GN format
- Insulated and balanced lid
- Rounded corners of inner pan
- Emergency all stop control button

Options

- Water filling to pan
- Recoiled hand-shower
- Strainer plate
- Wired remote control for tilting with IPX6 protection degree

Materials

- Construction of AISI 304 and 430 stainless steel
- Stainless steel frying surface
- Aluminum encased flat heating elements
- Control panel protection class IPX5

Volume

Futura HD 200

Net volume	200 L
Brut volume	225 L
Frying surface	0.78 m ²
Weight	370 kg

Electrical connection

Futura HD 200	Connected power/kW	Amp
3/N/PE AC 400V 50/60Hz	41.4 kW	63A

Water connection

Futura HD 200


Cold water connection	G3/4" male
-----------------------	------------

Futura HD 200 Brattpan

metos

Dimensions

1. Electrical connection. Cable gland PG29 for electrical supply cable.
Reserve 1.0 meter of cable above floor level.
2. Cold water connection G3/4" male, one-way valve must be fitted.
Valve not included in the delivery.
9. Floor drain

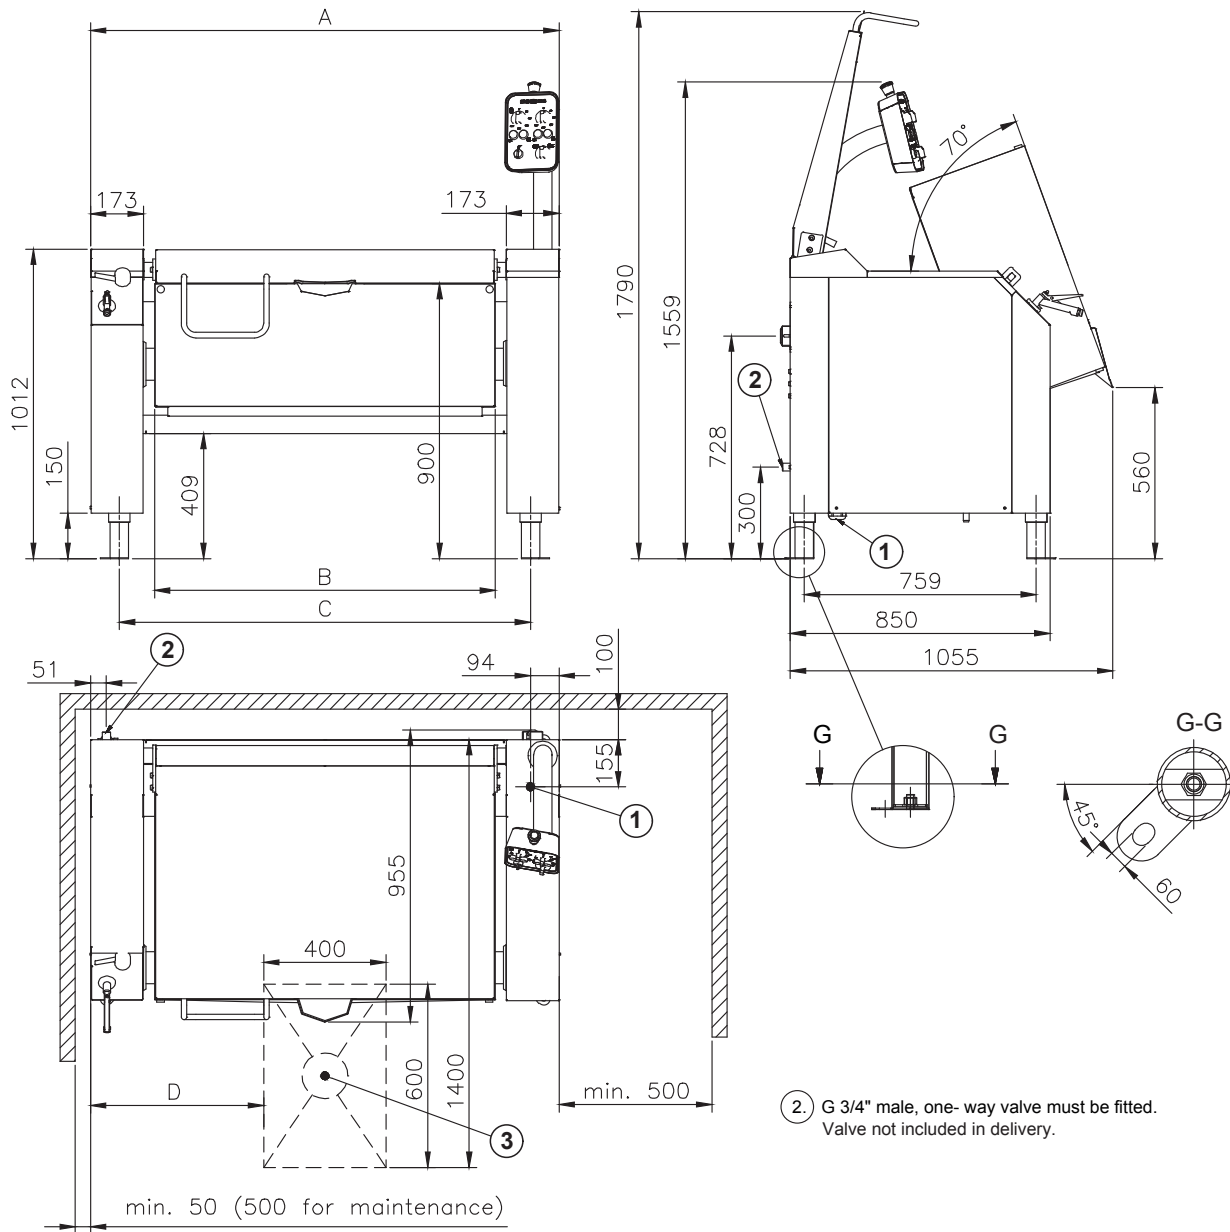

Metos	A	B	C	D
Futura HD 200	1858	1440	1670	730

National and local regulations must be observed when installing the pan.

an Ali Group Company



The Spirit of Excellence

Rev 10.12.2025