

MixPan 155 litres

Model – MixPan 155 code MG4224274



metos
cooking solutions

Metos Cooking Solutions

Ahjonkaarre, FI-04220 Kerava, Finland

Tel. +358 204 3913

mcs@metos.com

mcs.metos.com



Standard features

- Bratt pan with integrated mixer
- Temperature control between 50°C – 250°C
- Stepless mixing speed 5-40 rpm
- Two mixing programs, autoreverse
- Elevated control pillar
- Electric tilting with push button
- Tilting height 600 mm
- Safety grid lid
- Integrated mixer with three mixing arms
- Food grade thermopolymer scrapers for mixing tool

Options

- Frames for fixed installation (custom heights on request)
- Free standing frame with feet
- Group installation, also with Metos kettles
- Alternative operating voltages
- Water filling manual / automatic
- Hand showers standard, reel-in or heavy duty
- Draw off valves and taps

Materials

- Construction stainless steel EN1.4301, EN1.4016
- Protection class IPX5

Volume

Volume liters	Frying surface
Gross 174 l/ net 155 l	0.69 m ²

Electrical connections

Voltage	Power kW	Max current A	Fuse A
3/N/PE 400V	38.3	61.2	63A

Water connection


Cold water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option).

Hot water connection R1/2" (Ø15), to be fitted with non-return valve and shut off valve (option) - only for handshower.

MixPan 155 litres

Model – MixPan 155 code MG4224274


metos

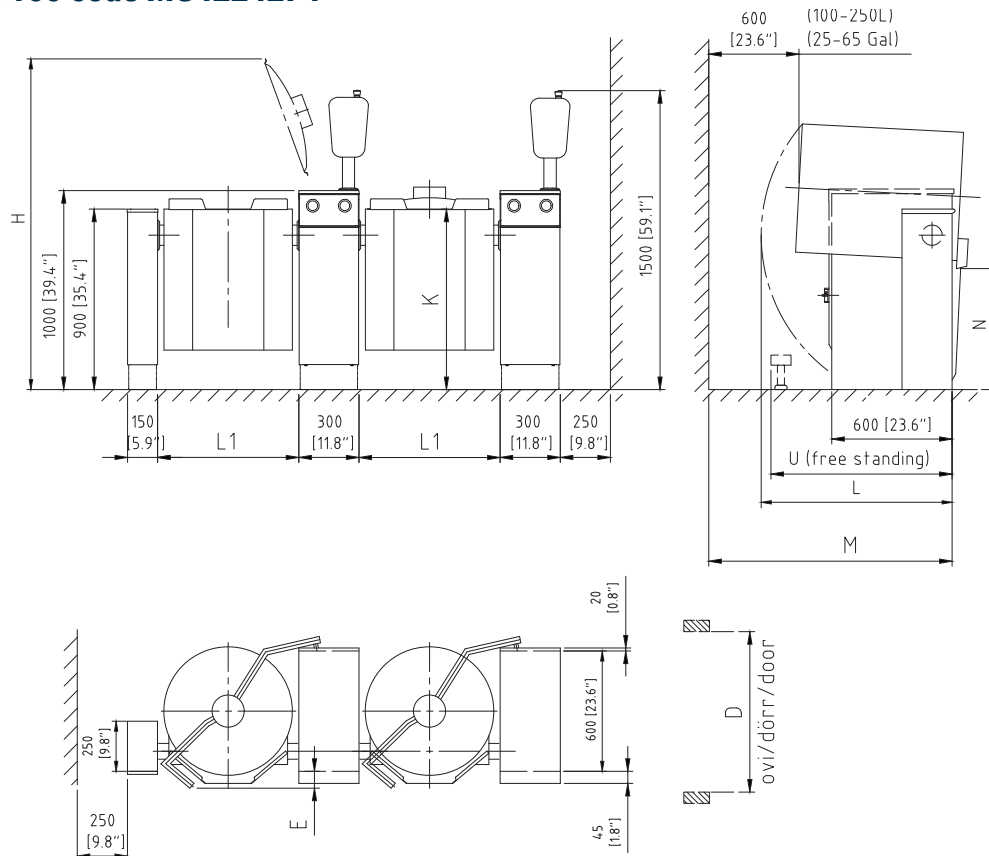

Floor mounted
Free standing

Dimensions in mm

	L1	H	K	L	M	M1	E	D (FM)	D (FS)	N	V	S	T	U	KG
100 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	255
150 l	910	1945	900	1060	1320	1314	110	1000	1250	600	924	800	600	1110	260
155 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	305
250 l	1110	2110	900	1200	1270	1264	150	1200	1200	600	1124	1000	600	1010	310

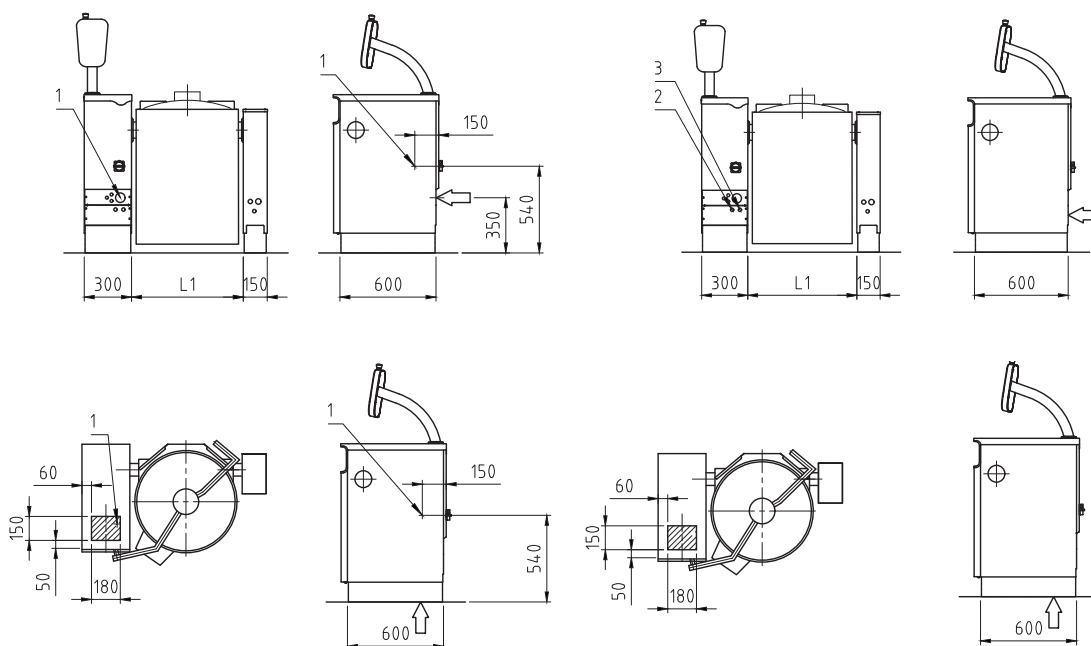

an Ali Group Company

National and local regulations must be observed when installing the pan.



The Spirit of Excellence



Rev 14.08.2026